
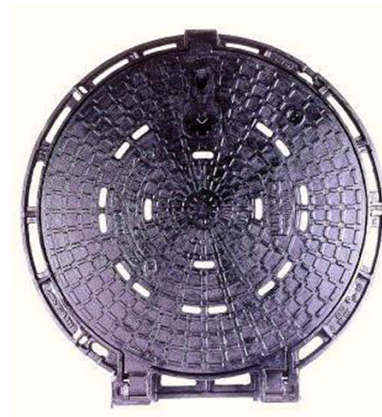


**Manhole cover PAMREX 800 Safety D400 class Round frame - Ventilated**

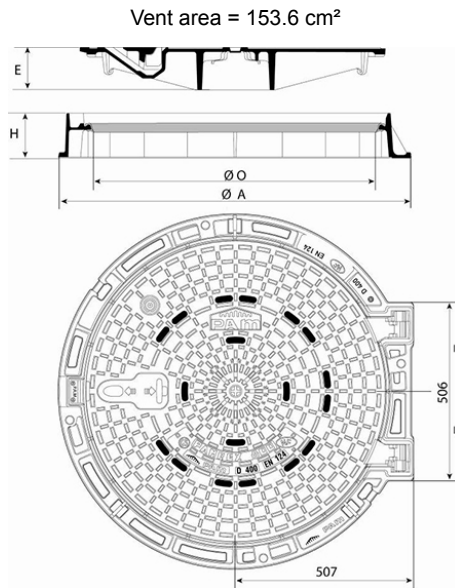

| A    | O   | H   | E   | Celková hmotnost | Hmotnost víka | Balení | Kód      |
|------|-----|-----|-----|------------------|---------------|--------|----------|
| mm   | mm  | mm  | mm  | kg               | kg            |        |          |
| 1000 | 800 | 125 | 115 | 120.8            | 73.0          | 10     | CDPA80FF |

**Material and coating:**

- Frame in Ductile Iron EN GJS 400-15: bituminous coating
- Cover in Ductile Iron EN GJS 400-15: water base coating
- Ring in elastomer

**Field of application:**

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

**Main characteristics:**

- Compliance with EN124-2:2015 testified by SG PAM as the standard allows it
- Hinged cover and ergonomic handling box
- Interchangeable covers

|                                     |   |                      |
|-------------------------------------|---|----------------------|
| <b>PAMREX</b><br>MUNICIPAL CASTINGS |  | 09/17/2021           |
|                                     |   | <b>VD40RENPMX429</b> |

- Frame fitted for optimized bedding
- Opens to 130°, blocks at 90° when closing
- Identification of the versions
- Operating Key C24

### **Conformity:**

Saint-Gobain PAM attests that:

- the above mentioned products are manufactured in compliance with specifications, materials & characteristics as per EN124-2 : 2015 standard
- the features and performances of the above mentioned products are controlled and comply with requirements of EN124-1 : 2015 standard

The PAM brand affixed on these related products materialises this attestation of conformity.

### **Security:**

- Quarter turn locking system
- Mudpan
- Opening / Closing assistance